



In application of the Directive ref. 89/686/EEC of the 21st of December 1989, concerning the alignment of member state legislation relating to personal protective equipment and the decrees n° 92□765, 766 and 768 of 29th of July 1992 concerning the transposition of this Directive into French law,

CTC - Centre Technique Cuir Chaussure Maroquinerie

Parc Scientifique Tony Ganier - 4,rue Hermann Frenkel - 69367 Cedex 07 - France
Tel +33 (0)4 72 76 10 10 - Fax +33 (0)4 72 72 76 10 00 - E-Mail : ctclyon@ctcgroupe.com - www.ctc.fr
Centre Technique Industriel - Loi du 22.07.1948 - Siren 775649726 - Code NAF 911 C - TVA FR 88775649726

authorized by decrees of the Ministry of Work, Employment and Professional Training of the 11th of August 1992 and 24th of December 1996,

registered under the number 0075, published in OJEC, delivers :

CE TYPE EXAMINATION CERTIFICATE
0075/1120/162/09/09/0386

To the following model of personal protective equipment :

* protective glove against mechanical risks.

* reference of the model : N2112

* responsible for placing on the market :

SHANDONG XINGYU GLOVES CO.,LTD
MIDDLE YAOQIAN ROAD CHAOYANG DISTRICT GAOMI CITY SHANDONG
PROVINCE
CHINA

Description of the protective glove, reference of technical rules verified in the context of the CE type examination and informations indicated on the product are detailed in the following page of this certificate.

Issued by Lionel GAUDILLERE

Drawn up in Lyon, on September 16th, 2009

CTC
4, rue Hermann Frenkel
69367 Lyon Cedex 07 - France

Tél. +33(0)4 72 76 10 10 - Fax +33(0)4 72 76 10 00
www.ctcgroupe.com

NOTA : Any modification to new items of the personal protective equipment object of this CE type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the CE type approval certificate (change of adress, change of company status) should be brought to the attention of the notified body in accordance with law n° R. 233-62 of the French Code of Work

1. DESCRIPTION OF THE PROTECTIVE GLOVE

According to the technical file index : 01

Reference : N2112

Basic Model

Dated : September 2009

13G glove coated with nitrile

Available sizes :

7/S 8/M 9/L 10/XL 11/XXL

Visual description :



Material :

	Colour	Material	Gauges	Thickness
PALM	Black	Nitrile	13 gauges / inch	
BACK	Black	Polyester	13 gauges / inch	
LINING				
CUFF	Black	Polyester	13 gauges / inch	
BINDING	Black/white/red/blue/yellow	Polyester		

2. PROTECTION SCOPE

Compliance with the essential requirements of the Directive 89/686/EEC has been verified by using following technical rules:

- * EN 420: 2003 - General requirements for gloves and test methods
- * EN 388: 2003 - Protective glove against mechanical risks
- * Directive 2002/61/CE : - This product fulfilled the requirements given by the Directive.

References of test reports performed in order to verify the compliance with the requirements of the technical rules :

Laboratory	CTC Asia	CTC France	Other
EN 420	03959-09, SH60128-09		
Azo	SH60128-09		
EN 388	03959-09		

Performance levels offered against mechanical risks (EN 388:2003) are :

Abrasion resistance	Blade cut resistance	Tear strength resistance	Puncture resistance
4	1	2	1

The levels of performance have been measured on the palm




3. MARKING

Each glove is clearly marked with the following informations :

- * Logo of the authorized representative :
- * CE marking
- * reference of the model : N2112
- * size
- * pictogram for mechanical risks followed by the performance levels
- * information pictogram

Marking example :

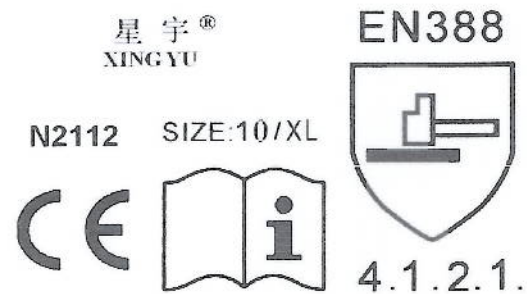

SHANDONG XINGYU GLOVES CO.,LTD

MANUFACTURER'S TECHNICAL FILE

Reference of the product	:	N2112
Technical file index	:	01
Last update	:	September 2009

IDENTIFICATION

Reference of the product : N2112
Technical file index : 01
Last update : September 2009

CE Type Examination Applicant :

SHANDONG XINGYU GLOVES CO.,LTD
MIDDLE YAOQIAN ROAD CHAOYANG DISTRICT GAOMI CITY SHANDONG
PROVINCE
CHINA
tel : 0086-536-2582678
fax : 0086-536-2589906

Manufacturer :

SHANDONG XINGYU GLOVES CO.,LTD
MIDDLE YAOQIAN ROAD CHAOYANG DISTRICT GAOMI CITY SHANDONG
PROVINCE
CHINA
tel: 0086-536-2582678
fax: 0086-536-2589906

European Representative :

LA FIA SRL
VIA ROMA 4-80017 MELITO DI NAPOLI
ITALY

GLOVE DESCRIPTION

Glove description :

13G glove coated with nitrile

Visual description:



Available sizes :

Minimum length of glove (mm)	Sizes
230	7/S
240	8/M
250	9/L
260	10/XL
270	11/XXL

Glove constitution :

	Reference	Colour	Material	Surfacic mass	Gauges	Thikness
PALM		Black	Nitrile	600g/m2	13 gauges / inch	
BACK		Black	Polyester	256g/m2	13 gauges / inch	
LINING						
CUFF		Black	Polyester	417g/m2	13 gauges / inch	
BINDING		Black/white/red/blue/yellow	Polyester			

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protection Equipment Directive (89/686/CE).

This glove is designed for mechanical risks.

It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420 :2003

Dexterity : 5

PH of glove and lining is greater than 3.5 and lower than 9.5 : yes

Chromium VI lower than the detection limit : conform

Size : conform

Directive 2002/61/CE :

This product fulfilled the requirements given by the Directive 2002/61/CE (Azo dyes).

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2003

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	1
Tear strength resistance	2
Puncture resistance	1

TEST REPORTS

Laboratory	CTC Asia	CTC France	Other
EN 420	03959-09, SH60128-09		
Azo	SH60128-09		
EN 388	03959-09		

MARKING - PACKAGING

Information printed on the glove :

Logo of the authorized representative :

Logo


Glove's reference : N2112

Size indicator

Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Marking example :

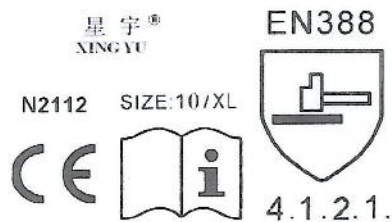

Method of marking on the glove :

printed on the back

Packaging :

1 doz/pe bag,200 doz/carton

MEANS OF CONTROL

From four steps mainly as following:

- 1.the supply of material:use high grade yarn of the market,excellent latex imported from southeast Asia,dye matter of free Azo
- 2.the facility of manufacture:have the state-of-the-art equipment,including the knitting machine,semiautomatic and automatic lines of dipping latex,printing machine of Logo,packing machine and others.
- 3.the technology of producing:the skilled employee and engineers rich of innovation,no stopping of perfecting technics
- 4.the means of producing course:test the latex concentration with measure device,adjust the dipping position to keep the same weight,retain the same latex mixture to insure the stable quality.
- 5.the methods of test:special test before every producing step,extra test necessary before shipment.
- 6.adjusting according to the customers' reflection:manufacture products with suitable specifactions

INSTRUCTION FOR USE

SHANDONG XINGYU GLOVES CO.,LTD

MIDDLE YAOQIAN ROAD CHAOYANG DISTRICT GAOMI CITY SHANDONG PROVINCE

Glove reference : N2112

Available sizes : 7/S 8/M 9/L 10/XL 11/XXL

Glove description :

13G glove coated with nitrile

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the directive 89/686/CEE : innocuousness, comfort, solidity

It has been subject to a CE type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

Applicable standards :

The glove meets the requirements of the standard EN 420 « General requirements for work glove ». Dexterity : 5

Moreover, this glove has been designed for the following applications :

Application :

Mechanical hazard - EN 388



4121

Levels of performance



Abrasion resistance	4
Blade cut resistance	1
Tear resistance	2
Puncture resistance	1

Protection limit :

The protection against risks or hazards which are not mentioned on this document is not warranted. The levels of performance mentioned are only valid for the palm of the glove. The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated. These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire.

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

Storage and cleaning notice

Keep in its original packaging , under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.